

IE-BHD-V04P**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com



PushPull plug-in connector according to IEC
61076-3-106 ver.4 (IEC24702), plastic, empty housing

General ordering data

Version	Device flange, Variant 4 to IEC 61076-3-106, IP67
Order No.	2027660000
Type	IE-BHD-V04P
GTIN (EAN)	4050118406061
Qty.	200 pc(s).

Creation date March 26, 2021 9:43:21 PM CET

Catalogue status 12.03.2021 / We reserve the right to make technical changes.

IE-BHD-V04P**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data**Dimensions and weights**

Depth	15.5 mm	Depth (inches)	0.61 inch
Height	22.3 mm	Height (inches)	0.878 inch
Net weight	0.01 g	Wall thickness, max.	3.5 mm
Width	32 mm	Width (inches)	1.26 inch

Temperatures

Operating temperature	-40 °C...70 °C
-----------------------	----------------

General data

Colour	Miscellaneous	Housing main material	PA UL 94 V0
Protection degree	IP67	UL 94 flammability rating	V-0

General standards

Certificate no. (cULus)	E471884	Connector standard	IEC 61076-3-106 Var. 4
-------------------------	---------	--------------------	------------------------

Classifications

ETIM 6.0	EC001031	ETIM 7.0	EC001031
ECLASS 9.0	27-18-27-02	ECLASS 9.1	27-18-27-02
ECLASS 10.0	27-18-27-02	ECLASS 11.0	27-18-27-02

Approvals

Approvals



ROHS	Conform
UL File Number Search	E471884

Downloads

User Documentation	Mounting instruction_2027660000-IE-BHD-V04P.pdf MAN IE GUIDE DE MAN IE GUIDE EN Designation key / Type key
--------------------	---


IE-BHD-V04P

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany


www.weidmueller.com

Drawings

Drawing

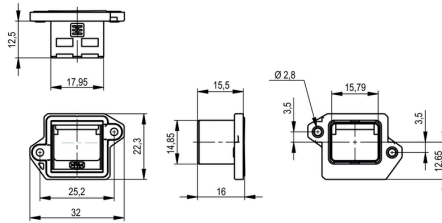

Installation cut-out



max. Paneldicke: 3,5mm
 max. Panel thickness: 3,5 mm

M2,5 Gewinde darf kein Sackloch sein
 M2.5 threads mustn't go through the panel